


PICTURES / DETAILS


Version with adjustable bracket




Version with adjustable bracket

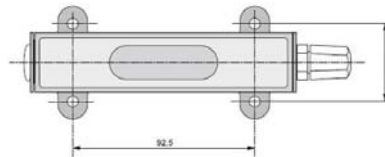

Version without bracket




Light measurement

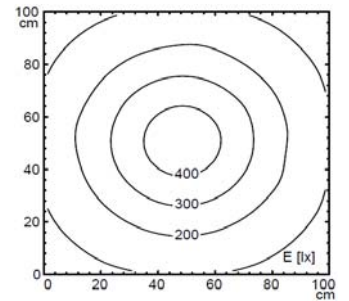

Distance: 50 cm


EIGENSCHAFTEN

<b>Fitted with:</b>	1 x 5 Watt (with 500 mA current feed)	
<b>Connected load:</b>	24 Volt (DC) +/- 20 % (19,2 – 28,8 Volt)	
<b>Connection:</b>	The ONE LED will be delivered without a connecting wire. The connection will be done via "Quickon-Connecting-System" (see picture). Following connection configuration has to be done: <ul style="list-style-type: none"> <li>1 DC</li> <li>2 DC</li> <li>3 not used</li> </ul> The ONE LED is protected against voltage reversal.	
<b>Material housing:</b>	Aluminum, pressure casting	
<b>System of protection:</b>	IP 67 (Glas) / IP 54 (PMMA)	
<b>Class of protection:</b>	II	
<b>Dimensions:</b>	195 x 30 x 30 mm (l x w x h)	
<b>Cover:</b>	4 mm tempered glass or 4 mm PMMA cover	
<b>Max. ambient temperature:</b>	50 °C	
<b>Optional on request:</b>	<ul style="list-style-type: none"> <li>▪ Feed through wiring</li> <li>▪ Reduced current feed with 350 mA</li> <li>▪ Further adoptions</li> </ul>	

24 Volt (DC)

Fitted with	Length	Cover	Bracket	Model	Order No.
1 x 5 W	195 mm	Glass		MVAL 1 S	112 887 034
		Glass	X	MVAL 1 S	112 887 037
		PMMA		MVAL 1 S	112 887 024
		PMMA	X	MVAL 1 S	112 887 027

ACCESSORIES OPERATING DEVICE (24 V)

	Connection rating	Output current	Connection	Assembly	Order-No.
	120-240 V, 50/60 Hz	24 Volt (DC)	max. 20 W	Clip for hat rail	209 585 029